



# MSO3000X Series Mixed Signal Oscilloscope

## Datasheet

V1.2

November 2024


# Product Introduction

MSO3000X series mixed signal oscilloscope with the maximum bandwidth of 500 MHz, maximum sampling rate of 5 GSa/s and equipped with 4 analog channels and 16 digital channels, the memory depth up to 500 Mpts. MSO3000X has unique Ultra Phosphor 3.0 technology, the waveform capture rate is up to 2,000,000 wfms/s, 256 grey temperature color, innovative digital trigger system with high trigger sensitivity and low jitter. This oscilloscope supports multiple advanced triggers, serial bus trigger and decoding, and supports the advanced sampling and analysis mode of spectrum analyzing, power analysis, histogram, waveform recording, enhanced resolution (ERES), hardware acceleration template testing, Search and Navigate. In addition, this oscilloscope has multiple measurements and mathematical operations. MSO3000X series adopts 10.1-inch capacitive touch screen that supports multiple gestures for common waveform operations and combined with multiple one-touch keys on the front panel, this greatly optimizes the efficiency of oscilloscope operation and improves the user experience.



# Mainstream touchscreen design, intelligent interactive experience

Featuring a 10.1-inch HD capacitive multi-touch screen, it supports a variety of gesture operations, such as touch, drag, zoom and rectangle drawing, making operation more convenient and smoother, and helping the user can master the instrument more easily. It retains the traditional key and knob operation while supporting mouse and keyboard, making instrument operation more versatile and greatly improving the interactive experience.

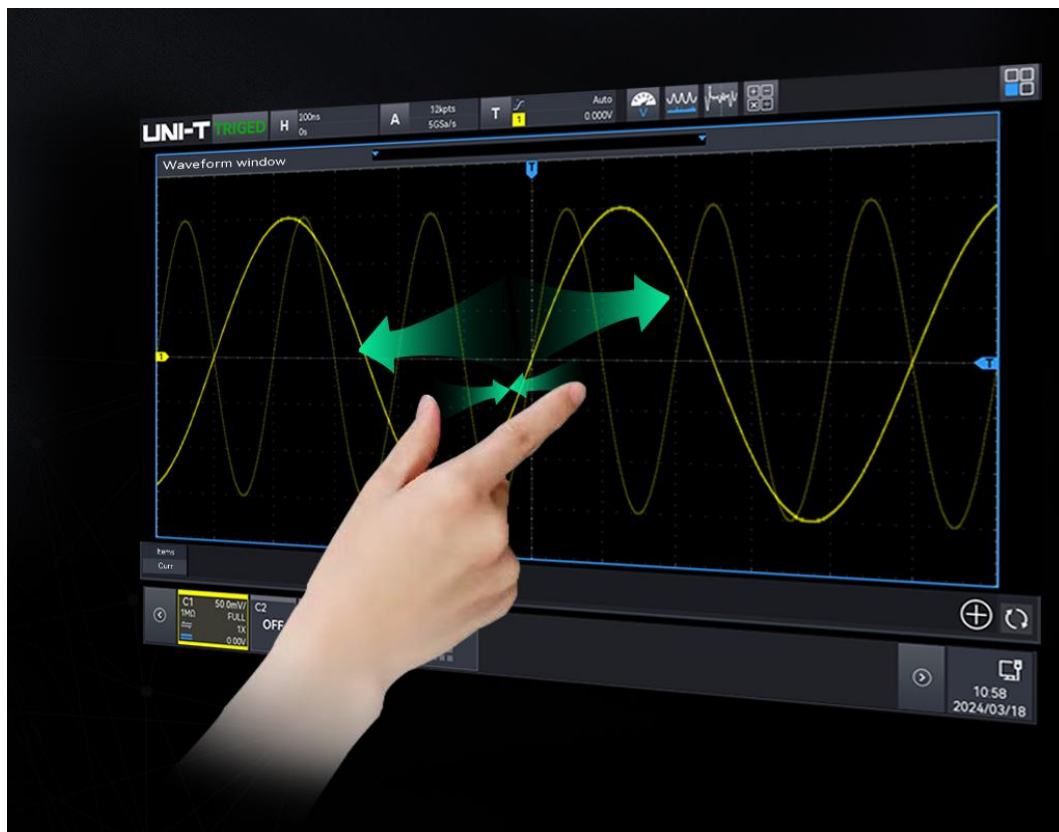

## Brand new appearance design

Innovative appearance of the instrument, double-sided thinning design; display and panel level, to enhance the touch operation and visibility range; display edge black frame margin + metal grey and black body, to enhance the overall sense of the instrument.



## Features and advantage


- Analog channel bandwidth: 500 MHz/350 MHz
- Real-time sampling rate of the analog channel is up to 5 GSa/s. The maximum sampling rate of the digital channel is 1.25 GSa/s
- 4 analog channels, 16 digital channels, Maximum memory depth 500 Mpts
- The maximum waveform capture rate is 800,000 wfms/s (sequence mode: 2,000,000 wfms/s)
- 9 instrument functions: Digital Oscilloscope, Logic Analyzer, Function/Arbitrary Waveform Generator, Spectrum Analyzer, Digital Voltmeter, Frequency Counter, Protocol Analyzer, Bode Plot Analyzer and Power Analyzer
- Built-in 50 MHz equivalent performance dual channel function/arbitrary waveform generator, supporting the ability to load the oscilloscope on-screen data to generate an arbitrary waveform output in real time. Also features multiple built-in arbitrary waveforms
- Bode plot loop test analysis to analyze the system stability
- Parameter measurement adds histogram and line graph display
- Up to 250,000 frames of uninterrupted hardware real-time waveform recording and analysis, with USB memory export support waveform recording and analyze
- Maximum 4Mpts enhanced FFT, supporting the spectrum analyzer function of frequency setting, waterfall curve, detection setting and marker
- 54 kinds of parameter measurement
- Multi-Windows display makes it easy to compare your channels the way you want, with drag-and-drop ease
- Multi-channel 7-digit hardware frequency counter, supporting adjustable frequency refresh time and effective digit
- Digital Voltmeter (DVM) function: DC, AC RMS and DC+AC RMS
- Multiple trigger types: edge, pulse width, ramp, runt pulse, over-amplitude pulse, delay, timeout, duration, setup & hold, Nth edge and code pattern
- Protocol trigger and decoding function: RS232/UART, I2C, SPI, CAN, CAN-FD, LIN, FlexRay, AUDIO, MIL-STD-1553B, Manchester, SENT, ARINC429
- Zone triggering for capturing accidental signal and observing complicated signal
- Ultra Phosphor3.0 super phosphor display effect, up to 256 grey display
- 10.1-inch 1280x800 HD capacitive multi-touch screen, supporting gesture control: click, slide, zoom, edit, and drag
- Multiple peripheral interfaces: USB Host, USB Device, LAN, EXT Trig, AUX Out (Trig Out, Pass/Fail, DVM), Gen Out, HDMI
- SCPI (Standard Command for Programmable Instrument)
- Built-in Webserver for accessing and controlling the instrument through browser, supporting PC/Mobile phone device for cross-platform access the instrument



# Design Features


## Cost-effective Nine-in-One integrated oscilloscope

MSO3000X series is integrated 9 instrument functions, which includes Digital Oscilloscope, Logic Analyzer, Function/Arbitrary Waveform Generator, Spectrum Analyzer, Digital Voltmeter, High-Precision Frequency Counter, Protocol Analyzer, Bode plot Analyzer, and Power Analyzer. This oscilloscope delivers exceptional value, offering top performance at an unbeatable price for users.

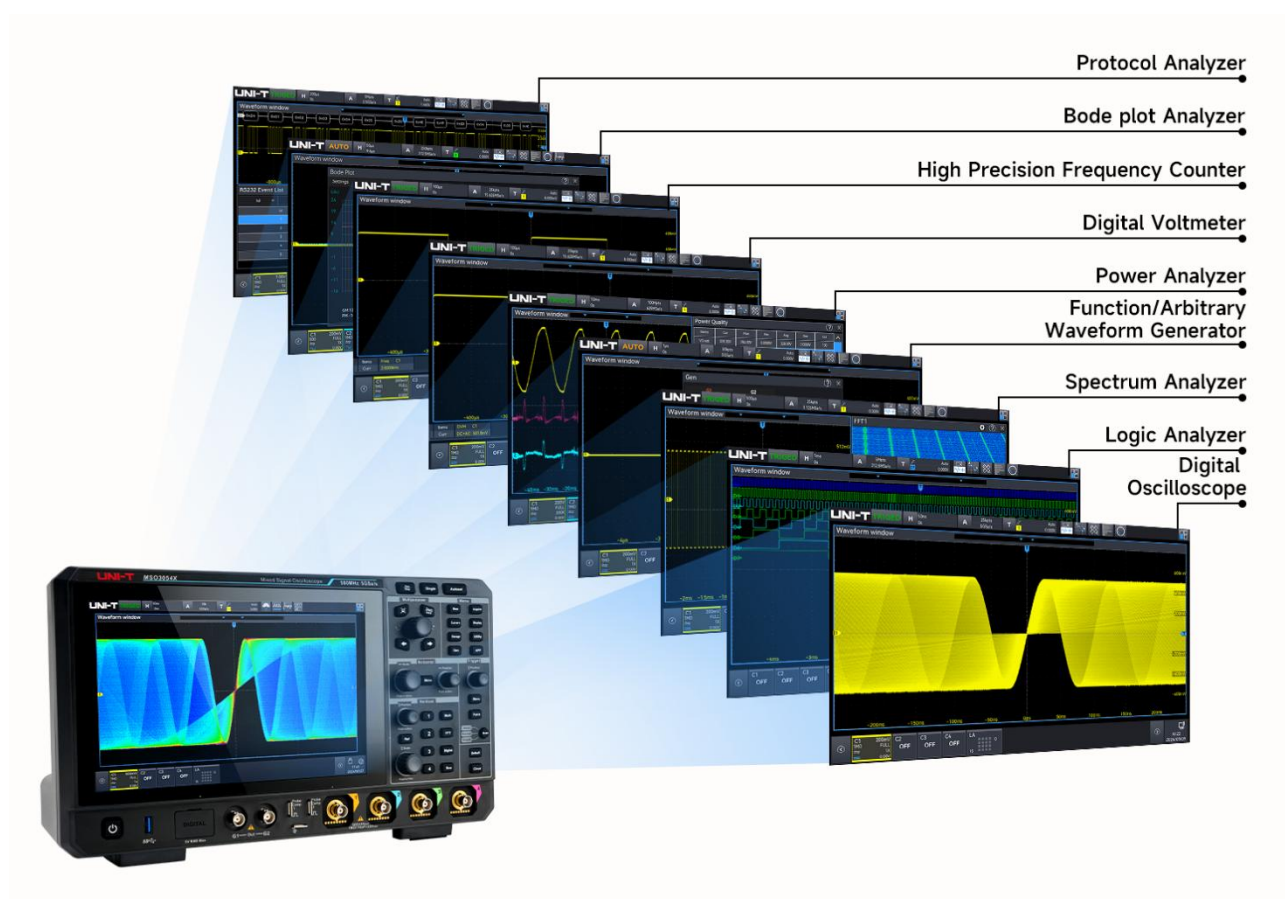

### Digital Oscilloscope

- Bandwidth: 500 MHz/350 MHz
- Maximum real-time sampling rate: 5GSa/s
- Maximum memory depth: 500 Mpts
- 4 analog channels, 1 external trigger channel

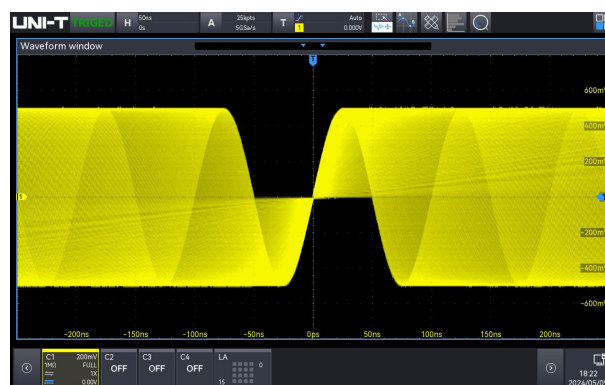


## Logic Analyzer (Option)

- 16-channel logic analyzer can be used with purchase of a UT-M15 logic analyzer probe (option)
- Logic analyzer software already installed
- Maximum sampling rate: 1.25 GSa/s
- Maximum memory depth: 250 Mpts
- Minimum detectable pulse width 800ps
- Digital probe provides high 8-bit and low 8-bit signal input port, it simplifies the connection of DUT. When connecting to a square pins, UT-M15 can be connected directly to 8x2 square pins 2.54 mm
- Logic analyzer probe UT-M15 has great electrical feature, the input impedance is  $101\ \Omega \pm 1\%$ , but the capacitive load is only 9.0 pF




## Function/Arbitrary Waveform Generator (Option)

- 50 MHz equivalent performance dual channel output
- Sampling rate: 250 MSa/s
- Vertical resolution: 16-bit
- Built-in multiple standard waves: Sine, square, pulse, ramp, arbitrary, noise and DC
- AM, FM, ASK, FSK and sweep output

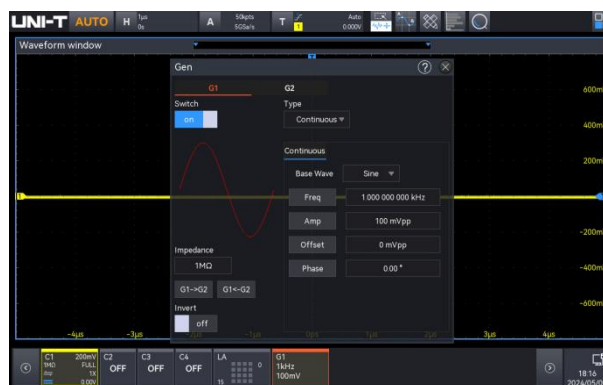

## Spectrum Analyzer

- Standard enhanced FFT, up to 4 Mpts, 4 channels signal analysis
- Frequency range: 0Hz~1 .25GHz
- Waterfall curve
- 4 traces and 4 detections
- Mark type: Auto, manual and threshold
- Marker point list

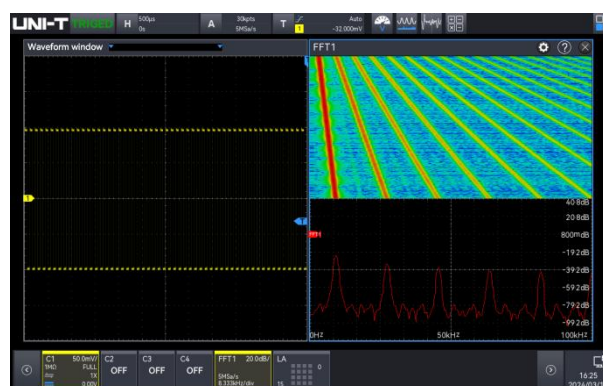


## Digital Voltmeter

- 4-digit voltmeter
- DC/ACRMS/AC+DCRMS
- Limit alarm



## High-Precision Frequency Counter

- 7-digit hardware frequency counter
- Adjustable frequency counter refresh time and effective digit
- Totalizer

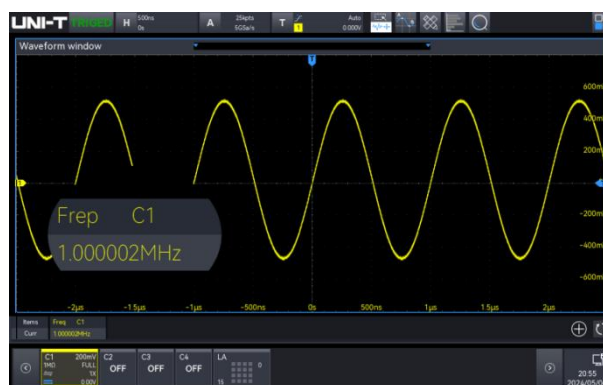

## Bode Plot Analyzer

- Included with Function/Arbitrary Waveform Generator Option
- Frequency response analysis
- Loop stability analysis
- Filter analysis
- Amplifier analysis



## Protocol Analyzer

- 12 kinds of trigger protocol and decoding, including computer serial bus, embedded serial bus, automobile, aerospace and audio
- Decoding can be operated in the pause and record modes
- Event list and search function





Option name	Description	Option model	Standard/Option
Computer serial bus triggering and decoding	RS-232/422/485/UART	-	Standard
Embedded serial bus triggering and decoding	I2C, SPI	-	Standard
Automobile serial bus triggering and decoding	CAN	MSO3000X-CAN	Option
Automobile serial bus triggering and decoding	LIN	MSO3000X-LIN	Option
Automobile serial bus triggering and decoding	CAN-FD	MSO3000X-CAN-FD	Option
Automobile serial bus triggering and decoding	FlexRay	MSO3000X-FLEX	Option
Automobile sensor bus triggering and decoding	SENT	MSO3000X-SENT	Option
Audio serial bus triggering and decoding	Audio	MSO3000X-AUDIO	Option
Aerospace serial bus triggering and decoding	MIL-STD-1553, ARINC 429	MSO3000X-AREO	Option
Wireless communication serial bus triggering and decoding	Manchester	MSO3000X-MANCH	Option

## Power Analyzer (Option)

With the development of chip technology, the power supply system requirements are also increased. When the power supply network of small voltage and high current has been the trend, especially for the chip or the power supply network composed of precision components, the requirements of the various parts of the circuit reliable power supply and noise suppression, but also to ensure that the integrity of the signal transfer between the chip, the power supply test has ushered in a greater challenge. The designer is more concerned about the energy-saving power supply and the response speed to ensure that the power supply is stable and clean.

Based on the currently tendency, the power integrity testing is particularly important, it directly affects the signal integrity, and in turn the signal quality also reflects the power quality, and even power quality will cause a series of electromagnetic interference problems, which makes the designer more headaches. So having an oscilloscope that can analyze the power supply is undoubtedly your most correct choice.

MSO3000X provides a full range of power analysis tools and evaluation results, you only need to select the appropriate analysis type, connecting the voltage probe and the current probe to the test point of power system or specified test fixtures as shown in the diagram, connecting to the channel that you want to observe, and then finally make appropriate fine-tuning to get the results you want.

- Power quality
- Harmonic analysis
- Switching loss\*
- Ripple wave analysis
- Loop analysis
- Safety operation area\*




\* Power analysis support is subject to the latest firmware on the official website.

## Ultra Phosphor 3.0

When you try to find and debug the occasional or intermittent anomalies in the signal, the waveform capture rate is a very important indicator. The capture rate of an oscilloscope is the ability to capture how many waveforms per unit of time, it reflects the oscilloscope speed of the process and analysis signal.


MSO3000X adopts advanced software and hardware architecture to achieve data processing that is 5 - 10 times higher than the previous version. It is equipped with Ultra Phosphor 3.0, which

supports 8-channel parallel graph mapping, the processing rate is up to 20 Gbps, the waveform capture rate is up to 800,000 wfms/s, and up to 2,000,000 wfms/s in the sequence mode. Compared with the traditional oscilloscope, the dead time of MSO3000X can be  $< 1\mu\text{s}$ , that is, capture 750ps fast edge signal of 2,000,000 per second, so the accidental signal can be captured easily and correctly.

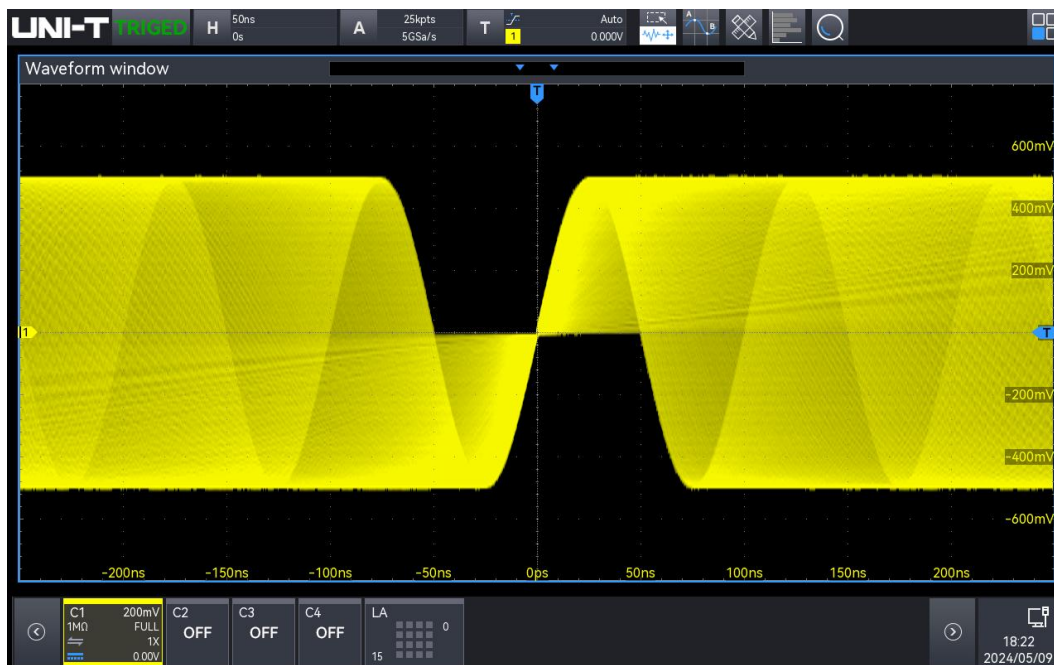

## Multi-Windows

Multi-Windows can be freely dragged and extended.

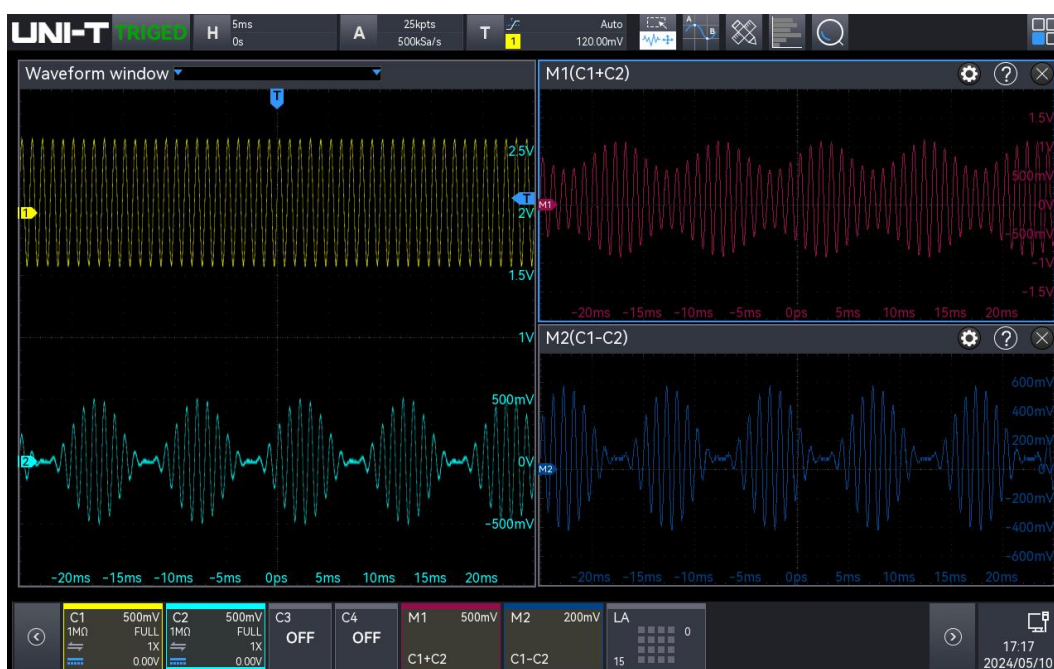

## Brand new quick Autoset strategy

Fuzzy control is an intelligent control method based on fuzzy set theory, fuzzy linguistic variables and fuzzy logic reasoning. The advantages of the algorithm are fewer iterations, faster speed, and better anti-interference ability.

In the past, the oscilloscope performed Autoset to find the appropriate signal amplitude and frequency to display, but the response speed of oscilloscopes is very different due to different solutions adopted by each oscilloscope manufacturer. This affected the experience of using oscilloscopes.

UNI-T redefines the execution of Autoset by adopting fast fuzzy algorithm based on analog signals and multi-channel parallel processing technology, combined with a 7-bit high-precision hardware frequency counter, which allows the oscilloscope to quickly find and process the amplitude and frequency of the unknown signals displayed when executing our exclusive Autoset strategy. It takes less than 1.5s to open the whole channel, and less than 1s to open a single channel, which greatly improves the working efficiency and reduces the risk of errors for users who need to change test objects frequently and need to test quickly.

## Multiple parameter measurements

Parameter measurement is a very important function for engineer when using an oscilloscope. Uni-T MSO3000X series provides 54 kinds of measurement parameters and added 27 measurement parameters can be displayed at the same time. Each page of measurement statistics displays 9 measurement parameters. These can be displayed as a histogram or a tendency chart. The histogram can visually show the possibility distribution of the parameter. The tendency chart can reflect the parameter changing with time.

The parameter snapshot shows 39 different test items for a single-channel measurement. It includes voltage and time measurement parameters for that channel, and the results are continuously updated during the process. MSO3000X series adds a new strategy of amplitude calculation for top and bottom. These enhancements make it convenient for the engineer to use the parameter measurement function. In addition, the added burst function of MSO3000X series can display the burst parameter, so that the channel measured data can be learned accurately and immediately.






## Waveform math

MSO3000X provides a system of algorithms for complex waveform math that you can use to further process your waveforms and display the results directly on the oscilloscope.

- Basic operation: +, -, \*, ÷
- Digital filter (high-pass, low-pass, band-pass and band-limit)
- Custom function operation: analog channel, reference waveform

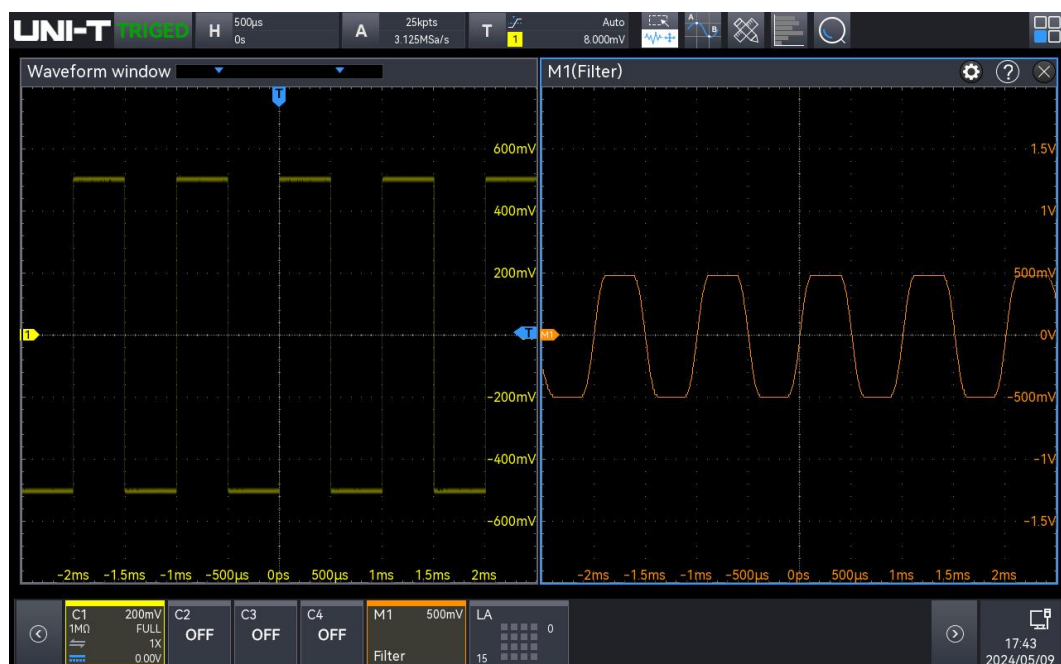

## Navigate and Search

The MSO3000X series has been enhanced with a memory depth of 500 Mpts, enabling it to capture tens of thousands of waveforms in a single capture. For electrical engineers, this means less time spent manually searching through waveforms. With customizable search conditions, you can quickly locate the exact signal you are interested in. Paired with advanced analysis functions, this feature streamlines your workflow, allowing for detailed event analysis without the hassle of time-consuming manual searches. This upgrade not only boosts efficiency but also enhances your ability to focus on critical design and troubleshooting tasks.



## Zone triggering

The zone triggering function offers a powerful dual benefit: isolating occasional abnormal signals and stabilizing waveform displays. For electrical engineers, this means you can handle complex and variable signals with confidence during debugging. The ease of use is a standout feature—simply draw a rectangle around the signal you want to observe, and the system does the rest. There's no need to invest time in learning complicated setups. Even when the waveform isn't completely stable, zone triggering can capture the relevant signal and ensure a stable trigger, making your work faster and more efficient.



## Various connection

MSO3000X series offers a wide range of connections for flexibility and convenience.

USB 3.0 host ports on the front and rear panel that allow you to easily transfer screenshots, detailed instrument configuration information and waveform data to a storage device. This also provides support for USB, keyboard and mouse access for intuitive data entry and control.

USB 3.0 device port on the rear-panel allows you to remotely control the oscilloscope from a PC. The HDMI port allows the oscilloscope's high-resolution display to be projected in real time on other external monitors, ideal for teaching and teamwork.

## WebServer

- SCPI for remote control
- Remotely check and control
- Export waveform file
- Browse user manual on-line
- PC/Mobile phone access



## Active probe UT-PA2000 (Option)

- Bandwidth: 2 GHz
- Offset range:  $\pm 8$  V
- DC attenuation ratio: 10:1  $\pm 1\%$
- Automatically sense the attenuation ratio
- Automatically adjust the scale and measured value





## Performance Characteristics

All specifications are guaranteed, except those marked "typical".

Unless otherwise stated, all the performance characteristics are suitable for the probe that the attenuation switch set to 10x and MSO3000X series mixed signal oscilloscope.

To meet these specifications, the oscilloscope should first meet the following conditions.

- The instrument must be operated continuously for at least thirty minutes at the specified operating temperature.
- The self-calibration must be performed when the operating temperature reaches or exceeds 5 °C.

Model	MSO3054X	MSO3034X
Analog bandwidth	500 MHz	350 MHz
Calculated rise time (10 to 90%) (typical)	≤0.80 ns	≤1.00 ns
Input/output channel number	4 analog channels	
	16 digital channels	
	2-channel signal output	
Sampling mode	Real-time sampling	
Acquisition mode	Normal, peak detect, high resolution, averaging, enhanced resolution	
ERES	Enhanced bit : 1 , 1.5 , 2 , 2.5 , 3 , 4 (8 to 12-bit)	
Maximum sample rate	Analog channel: 5 GSa/s (interweave mode), 2.5 GSa/s (non-interweave mode) Digital channel: 1.25 GSa/s	
Average	After all channels have reached N samples simultaneously, the number of N times can be selected from 2, 4, 8, 16, 32, 64, 128, 256, 512, 1024, 2048, 4096, 8192.	
Memory depth	Auto (limit to 5 Mpts), 25 kpts, 250 kpts, 500 kpts, 5 Mpts, 50 Mpts, 100 Mpts, Max	
Maximum waveform capture rate	800,000 wfms/s 2,000,000 wfms/s (sequence mode)	
Sequential sampling	Maximum 250,000 frames, minimum two trigger interval < 500 ns	
Hardware real-time waveform recording	Maximum 250,000 frames	

and playing	
Screen	10.1 - inch 1280x800 HD capacitive touch screen
<b>Vertical System (Analog channel)</b>	
Input coupling	DC, AC, GND
Input impedance	(1 M $\Omega$ ±2%)    (16 pF±3 pF) 50 $\Omega$ ± 1.5%
Probe attenuation factor	Voltage probe ratio: 0.001X, 0.01X, 0.1X, 1X, 10X, 100X, 1000X, Custom Current probe ratio: 5 mV/A, 10 mV/A, 50 mV/A, 100 mV/A, 200 mV/A, 500 mV/A, 1V/A, Custom
Maximum input voltage	1 M $\Omega$ : 400 V (DC+ACVpk) 135 V <sub>RMS</sub> 50 $\Omega$ : 5 V <sub>RMS</sub> Max
Vertical resolution	8-bit (ERES is enabled with a maximum of 12-bit)
Vertical scale	500 $\mu$ V/div to 10 V/div (1 M $\Omega$ ) 500 $\mu$ V/div to 1 V/div (50 $\Omega$ )
Offset range	500 $\mu$ V/div to 50 mV/div: ±2 V (50 $\Omega$ and 1 M $\Omega$ ) 100 mV/div to 1 V/div: ±5 V (50 $\Omega$ ) 100 mV/div to 1 V/div: ±25 V (1 M $\Omega$ ) 2 V/div to 10 V/div: ±250 V (1 M $\Omega$ ) Vertical offset reading: V
Band limit (typical)	50 $\Omega$ : 20 MHz , Full , Custom 1 M $\Omega$ : 20 MHz , Full , Custom
Low-frequency response	(AC coupling, -3 dB); ≤5 Hz (on BNC)
DC gain accuracy	<5 mV: ±3% full scale, ≥5 mV: ±2% full scale
DC offset accuracy	± (2%+0.1 div+2 mV)
Unit	W, A, V, and U, default: V
Channel-to-channel isolation(typical)	DC to maximum bandwidth: >40 dB
<b>Digital channel</b>	
Threshold	8-channel in one group
Threshold selection	TTL (1.4 V) 5.0 V CMOS (+2.5 V), 3.3 V CMOS (+1.65 V) 2.5 V CMOS (+1.25 V), 1.8 V CMOS (+0.9 V) ECL (-1.3 V) PECL (+3.7 V)

	LVDS (+1.2 V) 0 V Custom
Threshold range	$\pm 20.0$ V, 20 mV stepping
Threshold accuracy	$\pm (100$ mV + threshold setting of 3%)
Dynamic range	$\pm 10$ V + threshold
Input impedance	$(101$ k $\Omega \pm 1\%$ )    (9 pF $\pm 1$ pF)
Minimum voltage swing	500 mVpp
Minimum detectable pulse width (typical)	800 ps
Vertical resolution	1 bit
Channel-to-channel deskew range	$\pm 100$ ns

### Horizontal System (Analog channel)

	350 MHz (1 ns/div to 1 ks/div)
Time base range	500 MHz (500 ps/div to 1 ks/div) (simultaneously display the current sampling rate and memory depth)
Time base accuracy	$\pm 1$ ppm (original accuracy); $\pm 1$ ppm (the aging rate of first year); $\pm 3.5$ ppm (the aging rate of ten years)
Timebase delay time range	Pre-trigger (negative delay): $\geq 1$ screen width Post-trigger (positive delay): 1 s to 5 ks
	Y-T (default)
	X-Y (CH1-CH2, CH1-CH3, CH1-CH4, CH2-CH3, CH2-CH4, CH3-CH4)
Time base mode	Roll, time base $\geq 50$ ms/div, using the horizontal rotary knob to enter or exit Roll mode
	Scan, time base $\geq 50$ ms/div, user can select Roll or Scan mode

### Trigger

	CH1 to CH4:
	$\leq 10$ mV/div, The larger value of 1 div or 5 mVpp
	$> 10$ mV/div, 0.5 div
Trigger Sensitivity	EXT:
	400 mVpp, DC to 10 MHz
	800 mVpp, 10 MHz to External trigger bandwidth frequency (250 MHz)

	Enable the noise rejection, with trigger sensitivity reducing half
Trigger level range	Internal: $\pm 5$ div from the center of the screen EXT: $\pm 7$ V
Trigger modes	Auto, Normal, Single
Trigger holdoff range	0 ps to 10 s
Trigger coupling (typical)	DC: all signal can pass
	AC: block DC component of input signal
	HF reject: suppress high-frequency components of signals above 40 kHz
	LF reject: suppress low-frequency components of signals below 40 kHz
Noise reject	Suppress the high-frequency noise of signal, to reduce the error-touched possibility
<b>Zone Triggering</b>	
Zone	2 Zones; source: CH1 to CH4; Feature: Must Intersect, Must Not Intersect
<b>Edge</b>	
Slope	Rising, Falling, Either
Source	CH1 to CH4, AC Line, EXT, D0 to D15
<b>Runt</b>	
When	$>$ , $<$ , $\leq$ , $\geq$ , None
Polarity	Positive, Negative
Pulse width	3.2 ns to 10 s
Source	CH1 to CH4, D0 to D15
<b>Window</b>	
Polarity	Rising, Falling, Either
When	Enter, Exit, Time
Set	3.2 ns to 10 s
Source	CH1 to CH4
<b>Nth edge</b>	
Slope	Rising, Falling
Idle time	3.2 ns to 10 s
Edge number	1 to 65535
Source	CH1 to CH4, D0 to D15
<b>Delay</b>	
Edge type	Rising, Falling
When	$>$ , $<$ , $\leq$ , $\geq$ , $> <$
Delay time	3.2 ns to 10 s



Source	CH1 to CH4, D0 to D15
<b>Timeout</b>	
Slope	Rising, Falling, Either
Timeout	3.2 ns to 10 s
Source	CH1 to CH4, D0 to D15
<b>Duration</b>	
Code pattern	H, L, X
When	>, <, ≤ ≥
Duration	3.2 ns to 10 s
Source	CH1 to CH4, D0 to D15
<b>Setup and Hold</b>	
Clock edge	Rising, Falling
Data type	H, L
Setup	3.2 ns to 10 s
Hold	3.2 ns to 10 s
Source	CH1 to CH4, D0 to D15
<b>Pulse width</b>	
Polarity	Positive, Negative
When	>, <, ≤ ≥
Pulse Width	0.8 ns to 4 s
Source	CH1 to CH4, AC Line, EXT, D0 to D15
<b>Slope</b>	
Slope	Positive, Negative
When	>, <, ≤ ≥
Time	3.2 ns to 1 s
Source	CH1 to CH4
<b>Video</b>	
Standard	PAL, NTSC, SECAM, 525p/60, 625p/50, 720p/24, 720p/25, 720p/30, 720p/50, 720p/60, 1080i/25, 1080i/30, 1080p/24, 1080p/25, 1080p/30, 1080pfs/24
Source	CH1 to CH4
<b>Pattern</b>	
Code pattern	H, L, X, Rising, Falling
Source	CH1 to CH4, D0 to D15
<b>RS232/UART</b>	
When	Start, FrameErr, CheckErr, Data
Baud rate	2400 bps, 4800 bps, 9600 bps, 19200 bps, 38400 bps, 57600 bps, 115200

	bps, custom
Data bit	5 bits, 6 bits, 7 bits, 8 bits
Source	CH1 to CH4, D0 to D15

**I2C**

When	Start, Restart, Stop, Loss, Address, Data, Address & Data
Addr mode	7 bits, 10 bits
Addr range	0 to 7F, 0 to 3 FF
Byte length	1 to 5
Source	CH1 to CH4, D0 to D15

**SPI**

Mode	Timeout, CS
When	Start, Data
Timeout	100 ns ~1 s
Data bit	4 bits to 32 bits
Source	CH1 to CH4, D0 to D15

**CAN**

Signal type	CAN_H, CAN_L
When	Start, Data Frame, Remote Frame, Error Frame, Over-Load, Identifier, Data, Identifier & Data, End of Frame, Missing Ack, Bit Error, CRC Error, ALL Errors
Data rate	10 kbps, 19.2 kbps, 20 kbps, 33.3 kbps, 38.4 kbps, 50 kbps, 57.6 kbps, 62.5 kbps, 83.3 kbps, 100 kbps, 115.2 kbps, 125 kbps, 230.4 kbps, 250 kbps, 490.8 kbps, 500 kbps, 800 kbps, 921.6 kbps, 1 Mbps, 2 Mbps, 3 Mbps, 4 Mbps, 5 Mbps, custom
Source	CH1 to CH4, D0 to D15

**CAN-FD**

Signal type	CAN_H, CAN_L
When	Start, Data Frame, Remote Frame, Error Frame, Over-Load, Identifier, Data, Identifier & Data, End of Frame, Missing Ack, Bit Error ,CRC Error,ALL Errors
Data rate	10 kbps, 19.2 kbps, 20 kbps, 33.3 kbps , 38.4 kbps, 50 kbps, 57.6 kbps, 62.5 kbps, 83.3 kbps, 100 kbps, 115.2 kbps, 125 kbps, 230.4 kbps, 250 kbps, 490.8 kbps, 500 kbps, 800 kbps, 921.6 kbps, 1 Mbps, 2 Mbps, 3 Mbps, 4 Mbps, 5 Mbps, custom
FD data rate	250 kbps, 500 kbps, 800 kbps, 1 Mbps, 1.5 Mbps, 2 Mbps, 4 Mbps, 5 Mbps, 6 Mbps, 8 Mbps, custom
Source	CH1 to CH4, D0 to D15

**LIN**

Trigger condition	Sync, Identifier, Data, Identifier & Data, Wake Frame, Sleep Frame, Error
-------------------	---

Version	v1.x, v2.x, Either
Baud rate	1.2 kbps, 2.4 kbps, 4.8 kbps, 9.6 kbps, 10.417 kbps, 19.2 kbps, 20 kbps, custom
Data length	1 to 8
Source	CH1 to CH4, D0 to D15
<b>FlexRay</b>	
When	Start, Indicators, Identifier, Cycle, Heade, Data, Identifier & data, End frame, Error
Polarity	BM, BDiff/BP
Baud rate	2.5M bps, 5M bps, 10M bps, custom
Source	CH1 to CH4, D0 to D15
<b>Audio</b>	
When	Word, Left, Right, Any
Format	Standard, Left Aligned, Right Aligned, TDM
Source	CH1 to CH4, D0 to D15
<b>MIL-STD-1553B</b>	
When	Sync, Command, Status, Data, Error
Polarity	Positive, Negative
Source	CH1 to CH4
<b>SENT</b>	
When	Fast: Sync, Status, Data, CRC, STAT+Data, S&D+CRC, F_ CRC Error, CONT Pul Err Slow: Sync, Short ID, Short Data, Short CRC, Short ID & data, Enh ID, Enh Data, Enh CRC, Enh ID & data, SLO CH CRC error
Source	CH1 to CH4, D0 to D15
<b>Manchester</b>	
When	Start, Header SEG, Data SEG, Tail SEG, Error
Baud rate	500 bps to 10 Mbps
Source	CH1 to CH4, D0 to D15
<b>ARINC 429</b>	
When	Start bits, End bits, Label, Source/Destination Identifier, Data, Signal/Status Matrix, Label & bits, Parity error, Bit Error, Gap Error, All Error
Source	CH1 to CH4
<b>Decoding</b>	
Number of decodes	4
Decoding type	Standard: RS232/UART, I2C, SPI Option: CAN, CAN-FD, LIN, FlexRay, Audio, MIL-5TD-1553B, SENT,

	Manchester, ARINC 429
Parallel	Up to 18 bits parallel bus decoding, supports the combination of analog channel and digital channel and supports custom time setting
Source	CH1 to CH4 , D0 to D15
<b>Measurement</b>	
Cursor	Voltage difference between cursors ( $\Delta Y$ )
	Time difference between cursors ( $\Delta X$ )
	Reciprocal of $\Delta X$ (Hz) ( $1/\Delta X$ )
	Voltage and time of waveform point
	Display the cursor in the automatic measurement
Automatic measurements	<b>Analog channel: 54 kinds of parameters</b> Maximum, Minimum, Top, Base, Amplitude, Middle, Peak-Peak, Average, Average-Cycles, RMS, RMS-Cycles, AC RMS, AC RMS-Cycles, Area, Area-Cycles, +Area, -Area, +Area-Cycles, -Area-Cycles, +Overshoot, -Overshoot, +Preshoot, -Preshoot, Period, Frequency, Rise time, Fall time, +Width, -Width, +Duty, -Duty, +Pulse count, -Pulse count, Rising edge count, Falling edge count, Burst width, Burst Interval, Burst Period, Burst Per count, Ratio, Period Ratio, Setup time, Hold time, Setup & Hold Ratio, FRFR, FRFF, FFFR, FFFF, FRLF, FRLR, FFLR, FFLF, Phase(r-r), Phase(f-f)
	<b>Digital channel: 10 kinds of parameters</b> Frequency, Period, +Width, -Width, +Duty, -Duty, Rising delay A→B, Falling delay A→B, Phase A→B, Phase B→A
Measurement mode	Common measurement and accuracy measurement (Full memory hardware measurements)
Measurement type	Simultaneously display 27 kinds of parameter measurement
Measurement range	Main time base, Zoom time base, Cursor area
Measurement statistics	Mean, Maximum, Minimum, Std Dev, Count, Tendency chart, Histogram
XY measurement	Time, Cartesian, Polar, Product, Ratio
Analysis	Frequency Counter, DVM, Pass/Fail, Waveform recording, Bode plot, Power Analysis
<b>Math</b>	
Waveform math	A+B, A-B, A×B, A÷B, Advanced, Filter
Filter	Low pass, High pass, Band pass, Band stop
Operation	0,1,2,3,4,5,6,7,8,9(+, -, *, /, ^, >, <, &&,   , ==, !=)
Function	sin, cos, sinc, tan, sqrt, exp, lg, ln, floor, abs, acos, asin, atan, sinh, tanh, ceil,

cosh, fabs, intg, diff

**FFT**

Channel number	4
Window types	Hanning, Hamming, Rectangle, Blackman
FFT count	Up to 4 Mpts
FFT vertical scale	Vrms, dB
FFT	Waterfall: ON, OFF
	Spectrum range: Start frequency, Stop frequency, Center frequency, Span
	Four traces: Normal, Average, Max Hold, Min Hold
	Marker: Marker type, Marker Points, Marker list

**Storage**

Setting	Set Status(.set)
Waveform	Waveform data ( *.dat) (*.csv) (*.bsv)
Image	Image storage (*.bmp) (*.png) (*.jpg)
Report	Decoding Event List (*.csv) (*.pdf) (*.html)

**Function/AWG Gen (Option)**

Channel	2
Sample rate	250 MSa/s
Vertical resolution	16-bit
Maximum frequency	50 MHz
Standard	Sine, Square, Ramp, Noise, DC and Arbitrary wave
Built-in arbitrary	200 types including Sinc, ExpRise, ExpFall, Cardiac, Gauss, Lorentz, and HaverSine
Sine wave	Frequency range: 1 $\mu$ Hz to 50 MHz
	Flatness: $\pm 0.5$ dB (relative 1 kHz)
	Harmonic distortion: -40 dBc
	Non-harmonic spurious (typ): -40 dBc
	Total harmonic distortion: 1% (DC to 20 kHz, 1Vpp)
Square wave/Pulse wave	SNR: 40 dB
	Frequency range
	Square wave: 1 $\mu$ Hz to 15 MHz; Pulse wave: 1 $\mu$ Hz to 15 MHz
	Rising/falling time: <13 ns (typical 1kHz, 1Vpp, 50 $\Omega$ )
	Overshoot: typical 2% (1 kHz, 1 Vpp, 50 $\Omega$ )
Square wave/Pulse wave	Duty ratio
	Square wave: 1% to 99%, adjustable; Pulse wave: 1% to 99%, adjustable



	Resolution of duty ratio: 1% or 10 ns (take the greater value of both)
	Minimum pulse width: 20 ns
	Resolution of pulse width: 10 ns
	Jitter: 2 ns
Ramp wave	Frequency range: 1 $\mu$ Hz to 400 kHz
	Linearity: 1%
	Symmetry: 0.1% to 99.9%
Noise	Bandwidth: 50 MHz (typical)
Arbitrary wave	Frequency range: 1 $\mu$ Hz to 5 MHz
	Waveform length: 8 k
	Internal save position: 200
Frequency	Accuracy: $\pm 1$ ppm (original accuracy); $\pm 1$ ppm (the aging rate of first year); $\pm 3.5$ ppm (the aging rate of ten years)
	Resolution: 1 $\mu$ Hz
Amplitude	Output range: 20 mVpp to 6 Vpp (high resistance); 10 mVpp to 3 Vpp (50 $\Omega$ )
	Resolution: 1 mV
	Accuracy (Typical value: 1 kHz, sine wave, 0V, deviation): $\pm (5\%+2 \text{ mVpp})$
DC offset	Range: $\pm 3$ V (high resistance); $\pm 1.5$ V (50 $\Omega$ )
	Resolution: 1 mV
	Accuracy: $\pm$ (offset set value 5%+2 mV)

**AM**

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Source	Internal
Modulated wave	Sine, Square, Rising ramp, Falling ramp, Noise, Arbitrary wave
Modulation frequency	2 mHz to 50 kHz
Modulation depth	0% to 120%

**FM**

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Source	Internal
Modulated wave	Sine, Square, Rising ramp, Falling ramp, Noise, Arbitrary wave
Modulation frequency	2 mHz to 50 kHz
Deviation	12.5 MHz (maximum)

**ASK**

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Modulated wave	Square wave (Duty ratio 50%)
Modulation frequency	2 mHz to 50 kHz
<b>FSK</b>	
Carrier wave	Sine, Square, Ramp, Arbitrary wave
Modulated wave	Square wave (Duty ratio 50%)
Modulation frequency	2 mHz to 50 kHz
Hopping frequency	Any frequency within the range of the Carrier wave signal
<b>Sweep</b>	
Mode	Linear, Logarithmic
Sweep time	1 ms to 500 s
Start and stop frequency	Any frequency within the range of the waveform
<b>Display</b>	
Screen	10.1 - inch multi-touch capacitive screen
Resolution	1280×RGB×800 vertical pixel
Color	24-bit true colors
Persistence	Auto, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 5 s, 10 s, 20 s, infinite, close
Display type	Point, Vector
Real-Time clock	Time and data (user-defined)
Waveform Intensity	1% to 100% (default 50%)
Grid Intensity	0% to 100% (default 50%)
Backlight Intensity	1% to 100% (default 50%)
Transparent	0% to 100% (default 50%)
<b>Bode plot (Included with AWG Option)</b>	
Start frequency	50 Hz to 50 MHz
Stop frequency	60 Hz to 50 MHz
Count	1 to 1000
Amplitude	High resistance: 20 mVpp to 6 Vpp 50Ω: 10 mVpp to 3 Vpp
<b>DVM (typical)</b>	
Source	Analog channel

Mode	DC, AC+DC RMS, AC RMS
Resolution	4-bit
Buzzer	Beeps when the specified limit values are reached or exceeded

### Frequency Counter

Source	any analog channel and digital channel
Measurement	Frequency, Period, Totalizer
Counter	The maximum effective digits are 7, and the refresh time and effective digits are adjustable.
Maximum measurement frequency	Maximum bandwidth of analog channel
Time reference	Internal reference: $\pm 1$ ppm (original accuracy); $\pm 1$ ppm (the aging rate of first year); $\pm 3.5$ ppm (the aging rate of ten years)

### Interface

USB-Host 3.0	1 on the front panel, 2 on the rear panel
USB-Device 3.0	1 on the rear panel
LAN	LAN (VXI11), 10/100/1000 Base, RJ-45
AUX Out	Trig Out, Pass/Fail, DVM
Gen Out	2 on the front panel
10MHz reference input	50 $\Omega$ , amplitude 400 mVpp - 4.5 Vpp (-3.979 dBm, 17.044 dBm), frequency 10 MHz $\pm 10$ ppm
10MHz reference output	50 $\Omega$ , 1.65 Vpp square wave
HDMI <sup>1</sup>	1 port for external display or projector
WIFI	802.11b/g/n, WPA-PSK

### General technical specification

#### Probe compensator output

Output voltage	3 Vpp
Frequency	10 Hz ,100 Hz, 1 kHz (default), 10 kHz

#### Power Source

Power source voltage	100 V to 240 VAC (fluctuate: $\pm 10\%$ ) , 50 Hz/60 Hz 100 V to 120 VAC (fluctuate: $\pm 10\%$ ) , 400 Hz
Power consumption	120 W Max
Fuse	3 A, F-class, 250 V

### Environmental

Temperature	Operating: 0°C to +40°C
-------------	-------------------------

	Non-operating: -20°C to +70°C
Cooling	Forced cooling by fan
Humidity	Operating: below + 35 °C, relative humidity ≤90%; non-operating: +35 °C to + 40 °C, relative humidity ≤60%
Altitude	Operating: below 3,000 meters; non-operating: below 15,000 meters
Pollution degree	2
Operating environment	Indoor

### Mechanical Specifications

Dimension (W×H×D)	378 mm×218 mm×120 mm
Weight	3.83 kg

### Calibration interval

Calibration interval	1 year
----------------------	--------

### Safety Regulations

Compliance with EMC directive (2014/30/EU), compliance with or superior to IEC 61326-1:2021/ EN61326-1:2021, IEC 61326-2-1:2021/ EN61326-2-1:2021		
Electromagnetic compatibility	Conducted disturbance	CISPR 11/EN 55011 CLASS B group 1, 150 kHz - 30 MHz
	Radiation disturbance	CISPR 11/EN 55011 CLASS B group 1, 30 MHz - 1 GHz
	(ESD)	IEC 61000-4-2/EN 61000-4-2 4.0 kV (contact), 8.0 kV (air)
	Radio sensitivity	IEC 61000-4-3/EN 61000-4-3 0V/m (80 MHz to 1 GHz); 3V/m (1.4 GHz to 2 GHz); 1V/m (2.0 GHz to 2.7GHz)
	Electrical fast transient (EFT)	IEC 61000-4-4/EN 61000-4-4 2kV (AC input)
	Surge	IEC 61000-4-5/EN 61000-4-5 1kV (live to zero) 2kV (live/zero to ground)
	Radio continuous sensitivity	IEC 61000-4-6/EN 61000-4-6 3V, 0.15 - 80 MHz
	Voltage dip and short-term	IEC 61000-4-11/EN 61000-4-11 Voltage dip: 0% UT during 1 cycle;

	interruption	40% UT during 10/12 cycles; 70% UT during 25/30 cycles Short-term interruption: 0% UT during 250/300 cycles
	EN 61010-1:2010+A1:2019	
Safety	EN IEC61010-2-030:2021+A11:2021	
specification	BS EN61010-1:2010+A1:2019	
	BS EN IEC61010-2-030:2021+A11:2021	

## Remarks

1: only support standard HDMI, not support other adapters.



## Order information


	Description	Order No.
Model	MSO3054X (500 MHz, 5 GSa/s, 4 analog channels)	MSO3054X
	MSO3034X (350 MHz, 5 GSa/s, 4 analog channels)	MSO3034X
Standard accessories	National standard power cable x 1	
	USB3.0 cable x 1	UT-D30
	BNC-BNC direct-through line x 1	UT-L45
	BNC-red and black alligator connecting wire x 1	UT-L02A
	Passive probe (500 MHz/350 MHz) x 4	UT-P07A/UT-P08A
Optional accessories	350MHz Upgrade to 500MHz Bandwidth	MSO3000X-BW3M5T5M
	All serial bus triggering and decoding options	MSO3000X-BND
	Automobile serial bus triggering and decoding option (CAN, CAN-FD, LIN, FlexRay, SENT)	MSO3000X-AUTO
	Automotive serial bus triggering and decoding option CAN	MSO3000X-CAN
	Automotive serial bus triggering and decoding option CAN-FD	MSO3000X-CAN-FD
	Automotive serial bus triggering and decoding option LIN	MSO3000X-LIN
	Automotive Serial Bus Trigger and decoding Option FlexRay	MSO3000X-FLEX
	Automotive sensor serial bus triggering and decoding option SENT	MSO3000X-SENT
	Audio serial bus triggering and decoding option Audio	MSO3000X-AUDIO
	Aerospace serial bus triggering and decoding Option MIL-STD-1553	MSO3000X-MIL1553
	Aerospace serial bus triggering and decoding Option ARINC429	MSO3000X-ARINC429
	Wireless communication serial bus triggering and decoding option MANCHESTER	MSO3000X-MANCH
	Dual channel function/arbitrary waveform generator (Includes Bode Plot Analyzer)	MSO3000X-AWG
	Power analysis	MSO3000X-PWR





Isolation transformer	UT-ISOT
High voltage probe	UT-V23/UT-P21/UT-P20
High voltage differential probe	UT-P30/UT-P31/UT-P32/ UT-P33/UT-P35/UT-P36
Active probe single-end	UT-PA2000
Current probe	UT-P40/UT-P41/UT-P42/ UT-P43/UT-P44/UT-P403 0D/UT-P4150/UT-P4500/ P4100A/P4100B
16-channel logic analyzer probe	UT-M15

Remarks: Please order all instruments, accessories and options from your local UNI-T distributor.



# Oscilloscope's probes and accessories







## Passive probes

Model	Type	
UT-P01		High resistance probe
		1X: DC to 8 MHz 10X: DC to 25 MHz Oscilloscope compatibility: all series of UNI-T
UT-P03		High resistance probe
		1X: DC to 8 MHz 10X: DC to 60 MHz Oscilloscope compatibility: all series of UNI-T
UT-P04		High resistance probe
		1X: DC to 8 MHz 10X: DC to 100 MHz Oscilloscope compatibility: all series of UNI-T
UT-P05		High resistance probe
		1X: DC to 8 MHz 10X: DC to 200 MHz Oscilloscope compatibility: all series of UNI-T
UT-P06		High resistance probe
		1X: DC to 8 MHz 10X: DC to 300 MHz Oscilloscope compatibility: all series of UNI-T
UT-P07A		High resistance probe
		10X: DC to 500 MHz Input resistance: 10 MΩ Maximum of operating voltage: <600V pk Oscilloscope compatibility: all series of UNI-T

<p>UT-P08A</p> 	High resistance probe	<p>10X: DC to 350 MHz          Input resistance: 10 MΩ          Maximum of operating voltage: &lt;600V pk          Oscilloscope compatibility: all series of UNI-T</p>
<p>UT-P20</p> 	High resistance probe	<p>DC to 100 MHz          Probe coefficient: 100:1          Maximum of operating voltage: 1500 Vrms          Oscilloscope compatibility: all series of UNI-T</p>
<p>UT-V23</p> 	High voltage probe	<p>DC to 100 MHz          Probe coefficient: 100:1          Input resistance: 100 MΩ±2%          Maximum of operating voltage: 2000 Vpp          Oscilloscope compatibility: all series of UNI-T</p>
<p>UT-P21</p> 	High voltage probe	<p>DC to 50 MHz          Probe coefficient: 1000:1          Maximum operating voltage: DC 15 kVrms, AC 10 kV (sine wave)          Oscilloscope compatibility: all series of UNI-T</p>

## Current probes

Model	Type
<p>UT-P40</p> 	<p>Current probe</p> <p>DC to 100 kHz          Range: 50 mV/A, 5 mV/A          Current range: 0.4 A to 60 A          Maximum of operating voltage: 600 Vrms          Oscilloscope compatibility: all series of UNI-T</p>
<p>UT-P41</p> 	<p>Current probe</p> <p>DC to 100 kHz          Range: 100 mV/A, 10 mV/A          Current range: 0.4 A to 100 A          Maximum of operating voltage: 600 Vrms          Oscilloscope compatibility: all series of UNI-T</p>

<p>UT-P42</p> 	<p>Current probe</p>	<p>DC to 150 kHz Range: 100 mV/A, 10 mV/A Current range: 0.4 A to 200 A Maximum of operating voltage: 600 Vrms Oscilloscope compatibility: all series of UNI-T</p>
<p>UT-P43</p> 	<p>Current probe</p>	<p>DC to 25 MHz Range: 100 mV/A Maximum test current: 20 A Rising time: 14 ns Oscilloscope compatibility: all series of UNI-T</p>
<p>UT-P44</p> 	<p>Current probe</p>	<p>DC to 50 MHz Range: 50 mV/A Maximum test current: 40 A Rising time: 7 ns Oscilloscope compatibility: all series of UNI-T</p>
<p>UT-P4030D</p> 	<p>High-frequency current probe</p>	<p>Bandwidth: DC to 100 MHz Rising time: <math>\leq 3.5</math> ns Range selection: 30 A/5 A Maximum test current: 30 A Voltage of insulated line 300 V CAT I Oscilloscope compatibility: all series of UNI-T</p>
<p>UT-P4150</p> 	<p>High-frequency current probe</p>	<p>Bandwidth: DC to 12 MHz Rising time: <math>\leq 29</math> ns Range selection: 150 A/30 A Maximum test current: 150 A Voltage of insulated line 600 V CAT II 300 V CAT III Oscilloscope compatibility: all series of UNI-T</p>
<p>UT-P4500</p> 	<p>High-frequency current probe</p>	<p>Bandwidth: DC to 5 MHz Rising time: <math>\leq 70</math> ns Range selection: 500 A/75 A Maximum test current: 500 A Voltage of insulated line: 600V CAT II 300 V CAT III Oscilloscope compatibility: all series of UNI-T</p>



## UT-P4100A



Low-frequency  
current  
probe

Bandwidth: DC to 600 kHz  
Rising time:  $\leq 583$  ns  
Maximum test current: 100 A  
Range selection: 100 A/10 A  
Range sensitivity: 0.1 V/A, 0.01 V/A  
Common-mode voltage RMS: CATI 600 V  
CATII 600 V CATIII 300 V  
Oscilloscope compatibility:  
all series of UNI-T

## UT-P4100B



Low-frequency  
current  
probe

Bandwidth: DC to 2 MHz  
Rising time:  $\leq 175$  ns  
Maximum test current: 100 A  
Range selection: 100 A/10 A  
Range sensitivity: 0.1 V/A, 0.01 V/A  
Common-mode voltage RMS: CATI 600 V  
CATII 600 V CATIII 300 V  
Oscilloscope compatibility:  
all series of UNI-T

## Active/Differential probes

## Model

## Type

## UT-PA2000



Active  
single-ended  
probe

10X: DC to 2 GHz;  
Input capacitance:  $\leq 1$  pF  
Dynamic range:  $\pm 7$  V (DC or peak AC)  
Oscilloscope compatibility:  
MSO7000X/MSO3000X/MSO3000HD series

## UT-P30



High voltage  
differential  
probe

DC to 100 MHz  
Attenuation ratio: 100:1, 10:1  
Input differential-mode voltage:  $\pm 800$  Vpp  
Oscilloscope compatibility: all series of UNI-T

## UT-P31



High voltage  
differential  
probe

DC to 100MHz

Attenuation ratio: 1000:1, 100:1

Input differential-mode voltage:  $\pm 1.5$  kVpp

Oscilloscope compatibility: all series of UNI-T

## UT-P32



High voltage  
differential  
probe

DC to 50 MHz

Attenuation ratio: 1000:1, 100:1

Input differential-mode voltage:  $\pm 3$  kVpp

Oscilloscope compatibility: all series of UNI-T

## UT-P33



High voltage  
differential  
probe

DC to 120 MHz

Attenuation ratio: 100:1, 10:1

Input differential-mode voltage:  $\pm 14$  kVpp

Oscilloscope compatibility: all series of UNI-T

## UT-P35



High voltage  
differential  
probe

DC to 50 MHz

Attenuation ratio: 500:1, 50:1

Rising time: 7 ns

Accuracy: 2%

Input differential-mode voltage:

1/50:130(DC+peakAC)

1/500:1300(DC+peakAC)

Input common-mode voltage:

100 Vrms, CATI

600 Vrms, CATII

Oscilloscope compatibility: all series of UNI-T

UT-P36



High voltage  
differential  
probe

DC to 50 MHz  
Attenuation ratio: 2000:1, 200:1  
Rising time: 3.5 ns  
Accuracy: 2%  
Input differential-mode voltage:  
1/200:560 (DC+peakAC)  
1/2000:5600 (DC+peakAC)  
Input common-mode voltage:  
2800 Vrms, CATI  
1400 Vrms, CATII  
Oscilloscope compatibility: all series of UNI-T

## Options ordering and installation

1. **Purchase options:** Based on your requirements, please purchase the specified function options from Uni-t Sales Personnel and provide the serial number of the instrument that needs the option installed.
2. **Receive certificate:** You will receive the license certificate based on the address provided in the order.
3. **Register and obtain license:** Visit the Uni-t official website license activation session for registration. Use the license key and instrument serial number provided in the certificate to obtain the option license code and license file.
4. **Install the option:** Download the option license file to the root directory of a USB storage device, and connect the USB storage device to the instrument. Once the USB storage device is recognized, the Option Install menu will be activated. Press this menu key to begin installing the option.

## Limited Warranty and Liability

Uni-T guarantees that the Instrument product is free from any defect in material and workmanship within three years from the purchase date. This warranty does not apply to damages caused by accident, negligence, misuse, modification, contamination, or improper handling. If you need a warranty service within the warranty period, please contact your seller directly. Uni-T will not be responsible for any special, indirect, incidental, or subsequent damage or loss caused by using this device. For the probes and accessories, the warranty period is one year. Visit [instrument.uni-trend.com](http://instrument.uni-trend.com) for full warranty information.



Learn more at: [www.uni-trend.com](http://www.uni-trend.com)



Register your product to confirm your ownership. You will also get product notifications, update alerts, exclusive offers and all the latest information you need to know.

**UNI-T** is the licensed trademark of UNI-TREND TECHNOLOGY CO., Ltd. The product information in this document subject to update without notice. For more information on UNI-T Test & Measure Instrument products, applications, or service, please contact UNI-T instrument for support, the support center is available on [www.uni-trend.com](http://www.uni-trend.com) ->[instruments.uni-trend.com](http://instruments.uni-trend.com)  
<https://instruments.uni-trend.com/ContactForm/>

### Headquarter

Uni-Trend Technology (China) Co., Ltd.  
Addresses: No.6, Industrial North 1st  
Road, Songshan Lake Park, Dongguan  
City, Guangdong Province, China  
Tel: (86-769) 8572 3888

### Europe

UNI-TREND TECHNOLOGY EU GmbH  
Addresses: Affinger Str. 12  
86167 Augsburg Germany  
Tel: +49 (0)821 8879980

### North America

Uni-Trend Technology US INC.  
Addresses: 3171 Mercer Ave STE  
104, Bellingham, WA 98225  
Tel: +1-888-668-8648