



Data Sheet

UDP3000S Series


Programmable Linear DC Power Supply



Main Features

- Maximum power up to 373W
- Four channel independent output: CH1/CH2: 0~30V/5A, CH3: 0~6V/3A, CH4: 5V/2A
- Multiple protection: OCP/OVP/OTP
- Excellent load regulation and line regulation
- Ultra low output ripple and noise
- Support one key serial and parallel output function
- The 4.3-inch TFT display can display three channels and multiple parameters at the same time
- List / delayer function to control voltage and current output as required
- External trigger function to realize industrial automation control
- Provide USB host, USB device, LAN, RS232, digital IO and other interfaces
- With waveform display function, real-time and dynamic display of output voltage / current / power waveform
- Intelligent speed control of fan can effectively reduce fan noise during operation
- Support 10 groups of file storage and transfer out, and support USB flash disk reading and writing
- High precision display of five-digit voltage / four-digit current, with resolutions of 10mV / 1mA and 1mV / 1mA
- Keyboard lock function to prevent misoperation
- Support SCPI remote command control

DC Power Supply Panel

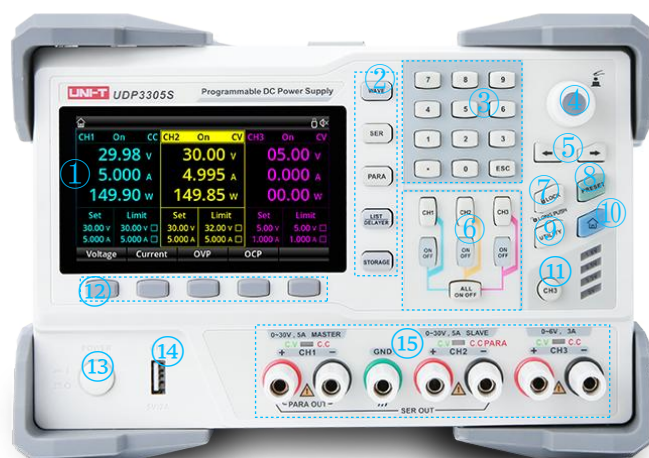

- ① LCD display ② Function key ③ Digital keyboard ④ Rotary encoder
- ⑤ Shift key ⑥ Channel selection and output control ⑦ Keyboard lock
- ⑧ Preset key ⑨ System settings ⑩ Home key ⑪ CH3 quick selection
- ⑫ Operation menu ⑬ Power switch ⑭ CH4 output
- ⑮ Output channel and indicator ⑯ USB HOST ⑰ LAN ⑱ USB device
- ⑲ Digital IO ⑳ RS232 ㉑ Fan ㉒ Input source selection ㉓ Protected GND
- ㉔ AC socket

Product Introduction

UDP3000S series is a high-performance programmable linear DC power supply. It has a clear LCD user interface, excellent performance indicators, a variety of analysis functions and communication interfaces. It can meet the diversified test needs of users. It aims to provide cost-effective DC programmable power supply equipment for teaching, scientific research, industry and other fields.


Human-computer interaction

UDP3000S series power supply has 4.3inch TFT LCD, which provides a human-computer interaction interface with rich functions and simple operation. The real-time information, setting value and limit value of three channels are displayed at the same time. The test interface is clear at a glance, saving the time of browsing and searching.



Excellent performance

UDP3000S series has excellent performance indicators. Provide cleaner and reliable DC power supply. It reduces unnecessary interference in use.

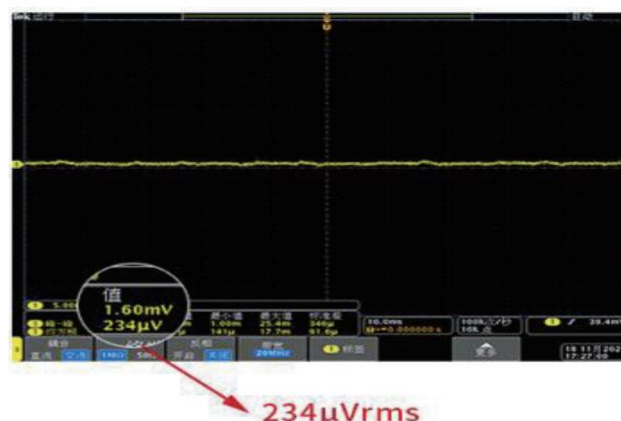

One key series parallel

All channels of this series of power supply are isolated from each other. One key series parallel connection of CH1 and CH2 can be realized through function keys. You do not need additional wiring. Just follow the interface diagram for wiring, which is fast and easy to operate. It provides you with a wider working range of power supply.




Remote control

This series of power supply provides a variety of remote connection interfaces of USB / LAN / RS232. It supports SCPI general protocol and is equipped with host computer software, which can set, view and carry out statistical work on PC.




Waveform display

UDP3000S series power supply has waveform display function, which can intuitively display the change trend of voltage, current and power. Provide users with better operation experience.

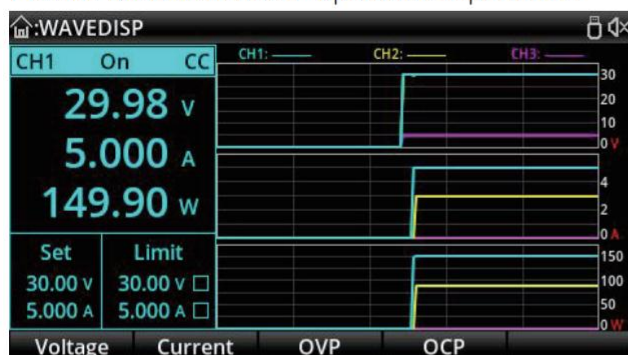

List/delayer function

UDP3000S series provides list and delayer functions. The power output curve can be edited freely to meet the test requirements. The delayer can be applied to the on-off test to investigate the reliability of the tested equipment.

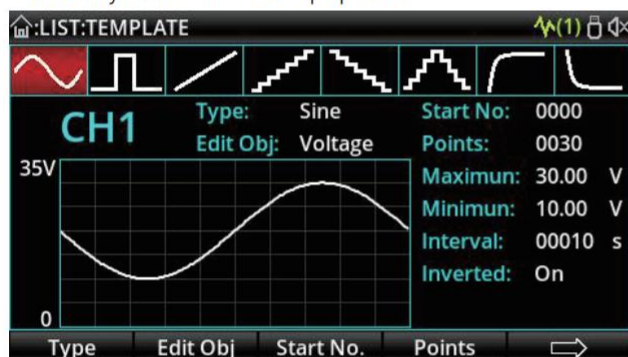

Protection function

UDP3000S series has OVP / OCP / OTP function to provide protection for power supply. It is equipped with current and voltage limit functions to provide guarantee for the tested equipment. It is equipped with monitor function, which can freely set protection conditions and give alarms.



External trigger

This series of power supply provides digital IO port, which can be edited as external trigger mode to realize remote control power supply. Set as output mode, it can provide trigger information and status flag for external instruments.



Preset function

UDP3000S series power supply can save 10 groups of list and delayer files respectively. You can save 5 sets of common configurations through presets. It provides convenience for quick access to common settings.

PRESET				
Preset1	Preset2	Preset3	Preset4	Preset5
	Volt(V)	Curr(A)	OVP(V)	OCP(A)
CH1	12.00	1.000	13.00 <input type="checkbox"/>	2.001 <input type="checkbox"/>
CH2	24.00	2.000	25.00 <input type="checkbox"/>	2.500 <input type="checkbox"/>
CH3	5.00	1.000	5.00 <input type="checkbox"/>	1.000 <input type="checkbox"/>
SER	36.00	5.000	36.00 <input type="checkbox"/>	5.000 <input type="checkbox"/>
PARA	30.00	06.000	30.00 <input type="checkbox"/>	06.000 <input type="checkbox"/>
Edit				Load

Technical Specification

Model		UDP3305S-E	UDP3305S
Channel	Channel	4	4
Output Rating	Voltage	CH1&CH2: 0~32V	CH1&CH2: 0~32V
		CH3: 0~6V	CH3: 0~6V
		CH4: 5V (USB Output)	CH4: 5V (USB Output)
	Current	CH1&CH2: 0~5A	CH1&CH2: 0~5A
		CH3: 0~3A	CH3: 0~3A
		CH4: 2A (USB Output)	CH4: 2A (USB Output)
	Power	348W	348W
CV mode	Regulation	Line Regulation: $\leq 0.01\%+2\text{mV}$	Line Regulation: $\leq 0.01\%+2\text{mV}$
		Load Regulation: $\leq 0.01\%+2\text{mV}$	Load Regulation: $\leq 0.01\%+2\text{mV}$
	Regulation	$<350\mu\text{Vrms}/2\text{mVpp}(5\text{Hz}\sim 1\text{MHz})$	$<350\mu\text{Vrms}/2\text{mVpp}(5\text{Hz}\sim 1\text{MHz})$
	Reaction time	$\leq 50\mu\text{s}$ (50% load variation, minimum load 0.5A)	$\leq 50\mu\text{s}$ (50% load variation, minimum load 0.5A)
	Command processing time	$<100\text{ms}$	$<100\text{ms}$
CC mode	Regulation	Line Regulation: $\leq 0.01\%+250\mu\text{A}$	Line Regulation: $\leq 0.01\%+250\mu\text{A}$
		Load Regulation: $\leq 0.01\%+250\mu\text{A}$	Load Regulation: $\leq 0.01\%+250\mu\text{A}$
	Ripple current	$\leq 2\text{mArms}$	$\leq 2\text{mArms}$
Tracking mode	parallel connection	Line Regulation: $\leq 0.01\%+2\text{mV}$	Line Regulation: $\leq 0.01\%+2\text{mV}$
		Load Regulation: $\leq 0.01\%+2\text{mV}$	Load Regulation: $\leq 0.01\%+2\text{mV}$
	series connection	Line Regulation: $\leq 0.01\%+3\text{mV}$	Line Regulation: $\leq 0.01\%+3\text{mV}$
		Load Regulation: $\leq 300\text{mV}$	Load Regulation: $\leq 300\text{mV}$
	Tracking error	$\leq 0.5\%+10\text{mV}$ (10~30V No load)	$\leq 0.5\%+10\text{mV}$ (10~30V No load)
		$\leq 0.5\%+30\text{mV}$ (0~9.99V No load)	$\leq 0.5\%+30\text{mV}$ (0~9.99V No load)
		Access load $\leq 300\text{mA}$	Access load $\leq 300\text{mA}$
measure	Display	Voltage full scale, 4-digit display; 4.3inch LCD	Voltage full scale, 5-digit display; 4.3inch LCD
		Current full scale, 4-digit display; 4.3 inch LCD	Current full scale, 4-digit display; 4.3 inch LCD
	Programming resolution	Voltage: 10mV	Voltage: 1mV
		Current: 1mA	Current: 1mA
	Readback resolution	Voltage: 10mV	Voltage: 1mV
		Current: 1mA	Current: 1mA
	Programming accuracy (25 \pm 5 $^{\circ}\text{C}$)	Voltage: $\pm (0.3\%+20\text{mV})$	Voltage: $\pm (0.03\%+10\text{mV})$
		Current: $\pm (0.2\%+5\text{mA})$	Current: $\pm (0.2\%+5\text{mA})$
Voltage programmed speed (1% of the total variation range)	CH1	Rise: full load $< 50\text{ms}$; No load $< 30\text{ms}$	Rise: full load $< 50\text{ms}$; No load $< 30\text{ms}$
		Fall: full load $< 45\text{ms}$; No load $< 400\text{ms}$	Fall: full load $< 45\text{ms}$; No load $< 400\text{ms}$
	CH2	Rise: full load $< 50\text{ms}$; No load $< 30\text{ms}$	Rise: full load $< 50\text{ms}$; No load $< 30\text{ms}$
		Fall: full load $< 45\text{ms}$; No load $< 400\text{ms}$	Fall: full load $< 45\text{ms}$; No load $< 400\text{ms}$
	CH3	Rise: full load $< 15\text{ms}$; No load $< 13\text{ms}$	Rise: full load $< 15\text{ms}$; No load $< 13\text{ms}$
		Fall: full load $< 22\text{ms}$; No load $< 100\text{ms}$	Fall: full load $< 22\text{ms}$; No load $< 100\text{ms}$
Temperature coefficient per $^{\circ}\text{C}$ (output percentage + offset)	CH1	Voltage: $0.01\%+5\text{mV}$	Voltage: $0.01\%+5\text{mV}$
		Current: $0.01\%+2\text{mA}$	Current: $0.01\%+2\text{mA}$
	CH2	Voltage: $0.01\%+5\text{mV}$	Voltage: $0.01\%+5\text{mV}$
		Current: $0.01\%+2\text{mA}$	Current: $0.01\%+2\text{mA}$
	CH3	Voltage: $0.01\%+2\text{mV}$	Voltage: $0.01\%+2\text{mV}$
		Current: $0.01\%+2\text{mA}$	Current: $0.01\%+2\text{mA}$

Channel 4 (USB output)	Output voltage	5V ±0.25V	5V ±0.25V
	Output current	2A	2A
Input	Voltage	AC 100V/120V/220V/230V±10%	AC 100V/120V/220V/230V±10%
	Frequency	50/60Hz	50/60Hz
	Power	MAX 600W	MAX 600W
	Fuse	AC220V : T4AL250V	AC220V : T4AL250V
		AC110V : T8AL250V	AC110V : T8AL250V
Environment	Operating temperature	0°C~40°C	0°C~40°C
	Operating humidity	20%~80% (non-condensing)	20%~80% (non-condensing)
	Storage temperature	-10°C~60°C	-10°C~60°C
	Altitude	≤2000 m	≤2000 m
	Pollution degree	2	2
Size and weight	Size	355mm*240mm*168mm	355mm*240mm*168mm
	Weight	10.2kg	10.2kg



*The UDP3000S series have been certified by CE, cETLus.

Standard accessories	
Alligator clip test lead double parallel	Red + Black / OD: 3.6mm/PVC double parallel(3.0 * 6.0mm ²) / 1200mm / 220V / 10A standard 4mm lantern head plug red / Black (RoHS)
UT-D14 USB data cable	USB 2.0 Double head print line black line length 1.5m "neutral" (RoHS)
Power cable	Fits the standard of destination country

Warranty

Three-years warranty, excluding probes and accessories.

Please visit https://instruments.uni-trend.com/list_190/65.html to learn more information.

To protect your investment, please purchase from UNI-T official authorized global distributors.

Find a Distributor

Find an authorized distributor here: <https://instruments.uni-trend.com/Network>

Contact UNI-T

E-mail: info@uni-trend.com

Test & Measurement Instruments Website: instruments.uni-trend.com

UNI-T Corporate Website: www.uni-trend.com

UNI-T group maintains a wide products category includes Digital Test & Measurement instruments, Field Testing Meter, Infrared thermal imaging products. As early as 2008, we continue to introduce self-developed Digital Test and Measurement instruments to the market and have made remarkable achievements. At present, we have formed a variety of product lines of Oscilloscope, AWG, Spectrum Analyzer, Bench Multi-meter, Power Supply, DC Load, Power Meter, LCR Meter, Micro Ohm Meter and Data logger. We have separated instruments sub-sites, instruments.uni-trend.com, on the basis of the original website www.uni-trend.com, in order to be more targeted to provide customers with better service and value.

UNITMKT-TMI-SCAL-2205-029

Instrument.uni-trend.com

UNI-T®